

The CFD simulation of porous claddings using the pressure-velocity jump approach: A prism surrounded by lamellar screens

Giovanni Lazzeri, Luca Patruno

DICAM, University of Bologna, Italy
giovanni.lazzeri2@unibo.it, luca.patruno@unibo.it

SUMMARY

The evaluation of the aerodynamic behavior of structures presenting porous claddings involves difficulties for both wind tunnel experiments and numerical simulations. In particular, when using physical reduced-scale models, small pores cannot be scaled down by simply preserving geometrical similarity, as this would lead to excessively small details, and anyway break aerodynamic similarity. Considering now computational fluid dynamics, the strong scale separation between the overall structure and the pores, forces to adopt extremely fine meshes and small time-steps if the complete geometry is reproduced. This leads to prohibitive computational costs. In this work, we investigate the numerical simulation of porous claddings through homogenization techniques and, in particular, the Pressure-Velocity Jump, PVJ, approach. The approach allows to consider the forces exchanged between the fluid and the cladding in a simplified way, allowing to represent their interaction. Results obtained by adopting the PVJ approach are compared to experimental results, showing good agreement.

Keywords: double-skin façade, porous elements, cladding loads, pressure-velocity jump, homogenized models.

1. INTRODUCTION

Porous claddings are increasingly used in architecture, often appearing in technical solutions which optimally combine energy-efficiency, aesthetics, cost-effectiveness and comfort. For instance, a popular use is represented by Permeable Double Skin Façades (PDSFs), in which a porous cladding is added at the exterior of the building. Early research works in this field can be traced back to Gerhardt and Janser (1994), who established that the net pressures on a porous façade critically depend on the edge sealing. Recent contributions can be found in Zasso (2019), Pomaranzi et al. (2020,2021,2022) and, more recently, in Aguinaga (2024) and Catania et al. (2024). In these works, the shielding effects of PDSFs with different geometries and characteristics have been studied, highlighting also their positive effects in moderating vortex induced vibrations.

However, despite their high technical interest, the study of porous claddings is hindered by difficulties arising from their multiscale nature. In particular, a major challenge is represented by the management of the wide scale separation between the building and the pores, that makes accurate analyses difficult via both Wind Tunnel Tests, WTTs, and Computational Fluid Dynamics, CFD, simulations. In fact, in WTTs the geometrical scaling of the pores usually leads to unmanageable small details and, additionally, it is hard to position pressure taps without interfering with the flow. Regarding CFD simulations, explicitly modelling the pores requires to mesh the permeable elements with adequate precision, leading to numerous small cells. The situation gets even worse when pores produce velocity concentrations, which may require to adopt very small time-steps to preserve the stability of the simulation. In these conditions, the resulting computational costs rapidly become insurmountable.

In this work, the difficulty in numerically simulating porous claddings is addressed by relying on homogenization techniques, which allow to model the permeable elements, seen as a porous medium, without explicitly reproducing their details. Between them, the Pressure-Velocity Jump PVJ approach is a model which extends the commonly adopted Pressure Jump, PJ, method (Xu et al. 2020,2022). Specifically, it is designed to account for the exchange of both normal and shear stresses between the porous cladding and the fluid, even at highly skewed orientations. This homogenized model eliminates the need of fine meshes in the porous elements. In particular, we investigate the aerodynamic behavior of a rectangular prism, representing an idealization of a high-rise building, composed of a permeable surface, which might be seen as the external layer of a PDSF, in which the internal building is removed for simplicity. The permeable elements consist of lamellar screens that exchange both normal and shearing stresses with the surrounding fluid, making the case a good validation for the proposed numerical method.

In the study, first, the PVJ model is calibrated based on simulations of an elementary portion of cladding. Then the calibrated model is used to evaluate the overall aerodynamic forces acting on the porous cladding using Large Eddy Simulation, LES. Results are compared to Explicit-LES, in which the complete detailed geometry is reproduced, as well as WTTs performed at Polytechnic of Milan, showing the good potential of the proposed methodology.

2. PVJ HOMOGENIZED MODEL

The Pressure-Velocity Jump, PVJ, model defines the pressure and tangential velocity jumps across a permeable surface. By applying conservation of mass and momentum in the normal and tangential directions, the pressure and tangential velocity jumps are calculated based on the aerodynamic forces per unit area exchanged between the porous element and the fluid.

The aerodynamic force vector $\mathbf{f}(\alpha) = [f_n(\alpha), f_t(\alpha)]^T$ is modeled as a function of the incidence angle α :

$$\mathbf{f}(\alpha) = \frac{1}{2} \rho |\mathbf{u}^2| |\hat{u}_n|^\gamma \mathbf{c}(\alpha), \quad (1)$$

where $\mathbf{u} = [u_n, u_t]^T$ is the upstream velocity vector, \hat{u}_n is its versor component in the normal direction and γ is a calibration coefficient. The coefficients $\mathbf{c}(\alpha)$ are expressed via a Fourier expansion, whose parameters can be determined through data fitting or, in simple cases, theoretical considerations. Further details on the model can be found in Xu et al. (2023,2024).

Finally, in this work, we modify the original PVJ formulation introducing a limiting strategy for the tangential velocity jump is introduced to ensure the simulation stability. The limiting strategy requires that the jump in tangential velocity does not result in an increase in fluid energy when crossing the porous cladding.

3. CASE STUDY AND RESULTS

A sketch of the geometry considered in the present study is shown in Fig. 1 (a). The porous cladding is a prism with square cross-section and with an aspect ratio of 5. Its surfaces are composed of lamellar screens inclined at 45° , with eight screens per side. These screens have an aspect ratio of 4 and span the full height of the model building.

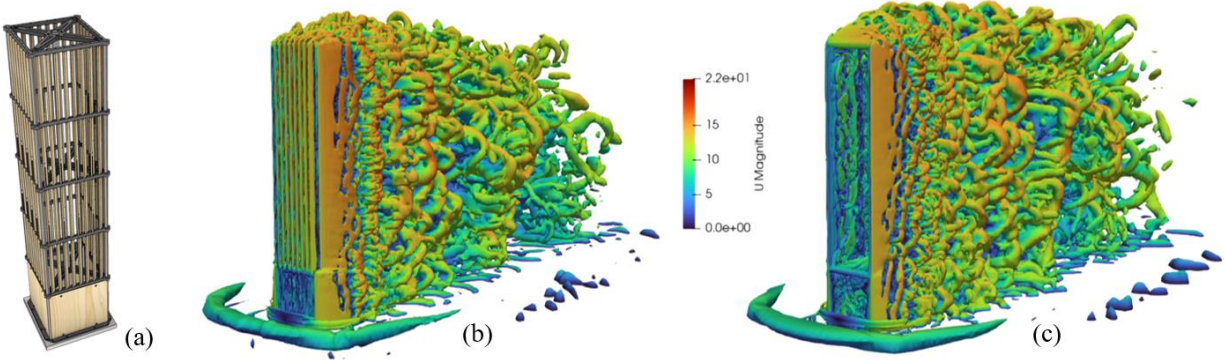


Figure 1: Overview of the considered porous prism: (a) geometry tested at Polytechnic of Milan, (b) LES with explicit model (Q-criterion) and (c) LES PVJ-based model.

Preliminary two-dimensional URANS of a section of the geometry reported in Fig. 1 (a), using explicit analyses, have been run with two purposes: (i) make a preliminary assessment of the PVJ calibration on simpler cases and (ii) perform a mesh sensitivity analysis, which established an optimal minimal resolution to be adopted in the proximity of the lamellae. In this case, all simulations were performed under periodic boundary conditions over an incidence angle range of -90° to 90° with 15° increments.

An overview of the flow fields obtained using the explicit and the PVJ-based models are shown in Fig. 1 (b) and (c), while a comparison between the PVJ-LES based results and WTTs is reported in Fig. 2 in terms of aerodynamic coefficients at varying angle of attack. It can be shown that a very good correspondence between the PVJ-LES and WTTs is observed in terms of drag, with maximum differences of approximately 7% while, for the lift, differences are more marked, but predictions appear to be consistent, at least in their general trend. Due to the high computational cost, the Explicit-LES was run only for the 0° . In this case, results agree well with WTT. The computational time required by PVJ-LES was found to be approximately 15% of Explicit-LES in the considered case.

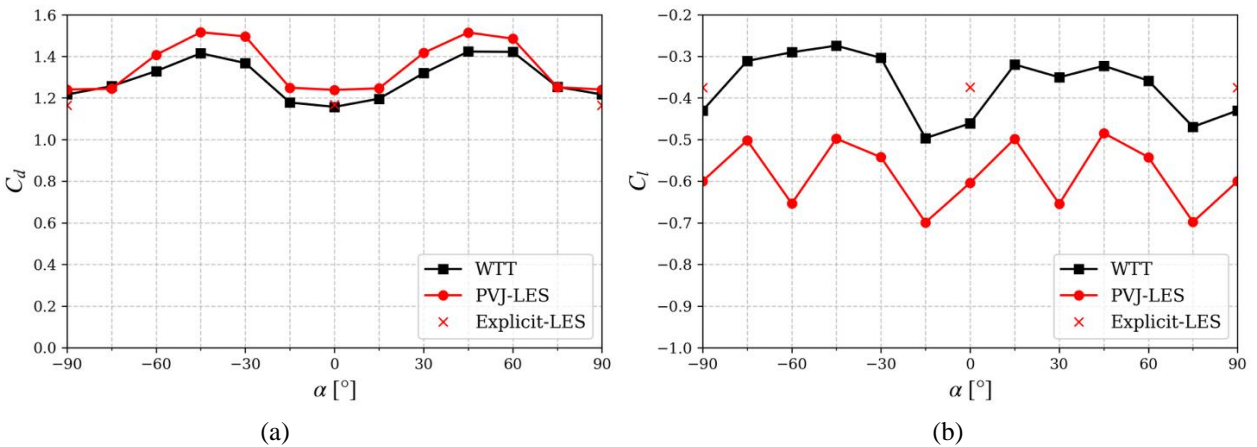


Figure 2: Force coefficients comparison: (a) drag force and (b) lift force.

4. CONCLUSIONS

In this contribution, the applicability of the PVJ approach in the simulation of porous lamellar screens has been assessed on a simplified building model, representative of a high-rise building with a porous façade. For simplicity, in this preliminary study, only the outer porous cladding is modelled. Within the simulations, the need to modify the original PVJ formulation introducing a limiter for velocity deflections emerged, aiming at avoiding stability issues which arise at highly skewed angles. Overall the PVJ-LES results well agree with WTTs in terms of drag coefficient. Moreover, the comparison between PVJ and explicit numerical models is also consistent, aligning well with the WTT data. Stronger differences emerge when comparing the lift force, which need further consideration. However, the proposed approach appears to be a promising simulation tool for building presenting porous claddings.

ACKNOWLEDGEMENTS

We acknowledge financial support under PRIN – Research Projects of National Interest (Italy), D.D. N. 104 of 02-02-2022 by the Italian Ministry of University and Research (MUR). Project Title “Safe design of porous Façades exposed to Extreme wind conditions - SaFEx”, CUP J53C24002880006. We also acknowledge the team working in the Polytechnic of Milan, which conducted the experimental tests within the same founding scheme.

REFERENCES

- Aguinaga, S. (2023). *Wind loads assessment on double-skin facades* [Preprint]. CSTB - Centre scientifique et technique du bâtiment. HAL Open Science. (hal-04628424)
- Catania, M., Pomaranzi, G., & Zasso, A. (2024). The role of Permeable Double Skin Façades on the onset of VIV on high-rise buildings. *Journal of Wind Engineering and Industrial Aerodynamics*, 253, 105831. <https://doi.org/10.1016/j.jweia.2024.105831>
- Gerhardt, H. J., & Janser, F. (1994). Wind loads on wind permeable facades. *Journal of Wind Engineering and Industrial Aerodynamics*, 53(1–2), 37–66. [https://doi.org/10.1016/0167-6105\(94\)90017-5](https://doi.org/10.1016/0167-6105(94)90017-5)
- Pomaranzi, G., Daniotti, N., Schito, P., Rosa, L., & Zasso, A. (2020). Experimental assessment of the effects of a porous double skin façade system on cladding loads. *Journal of Wind Engineering and Industrial Aerodynamics*, 196, 104019. <https://doi.org/10.1016/j.jweia.2019.104019>
- Pomaranzi, G., Bistoni, O., Schito, P., Rosa, L., & Zasso, A. (2021). Wind Effects on a Permeable Double Skin Façade, the ENI Head Office Case Study. *Fluids*, 6(11), 415. <https://doi.org/10.3390/fluids6110415>
- Pomaranzi, G., Pasqualotto, G., & Zasso, A. (2022). Investigation of the effects due to a permeable double skin façade on the overall aerodynamics of a high-rise building. *Wind and Structures*, 35(3), 213–227. <https://doi.org/10.12989/was.2022.35.3.213>
- Xu, M., Patruno, L., & de Miranda, S. (2023). A pressure–velocity jump approach for the CFD modelling of permeable surfaces. *Journal of Wind Engineering and Industrial Aerodynamics*, 233, 105317. <https://doi.org/10.1016/j.jweia.2023.105317>
- Xu, M., Patruno, L., Lo, Y.-L., & de Miranda, S. (2020). On the use of the pressure jump approach for the simulation of separated external flows around porous structures: A forward facing step. *Journal of Wind Engineering and Industrial Aerodynamics*, 207, 104377. <https://doi.org/10.1016/j.jweia.2020.104377>
- Xu, M., Patruno, L., & de Miranda, S. (2024). Simulation of permeable surfaces using the pressure–velocity jump approach: A lamellar screen upstream of a ground mounted obstacle. *Journal of Wind Engineering and Industrial Aerodynamics*, 250, 105756. <https://doi.org/10.1016/j.jweia.2024.105756>
- Zasso, A., Perotti, F., Rosa, L., Schito, P., Pomaranzi, G., & Daniotti, N. (2019). Wind Pressure Distribution on a Porous Double Skin Façade System: IN-VENTO 2018. In R. Aguilar, D. Toral, M. S. (Eds.), *Proceedings of the 6th International Conference on Mechanical Models in Structural Engineering* (pp. 721–734). Springer, Cham. https://doi.org/10.1007/978-3-030-12815-9_55